


# Installation Manual (WET 5)

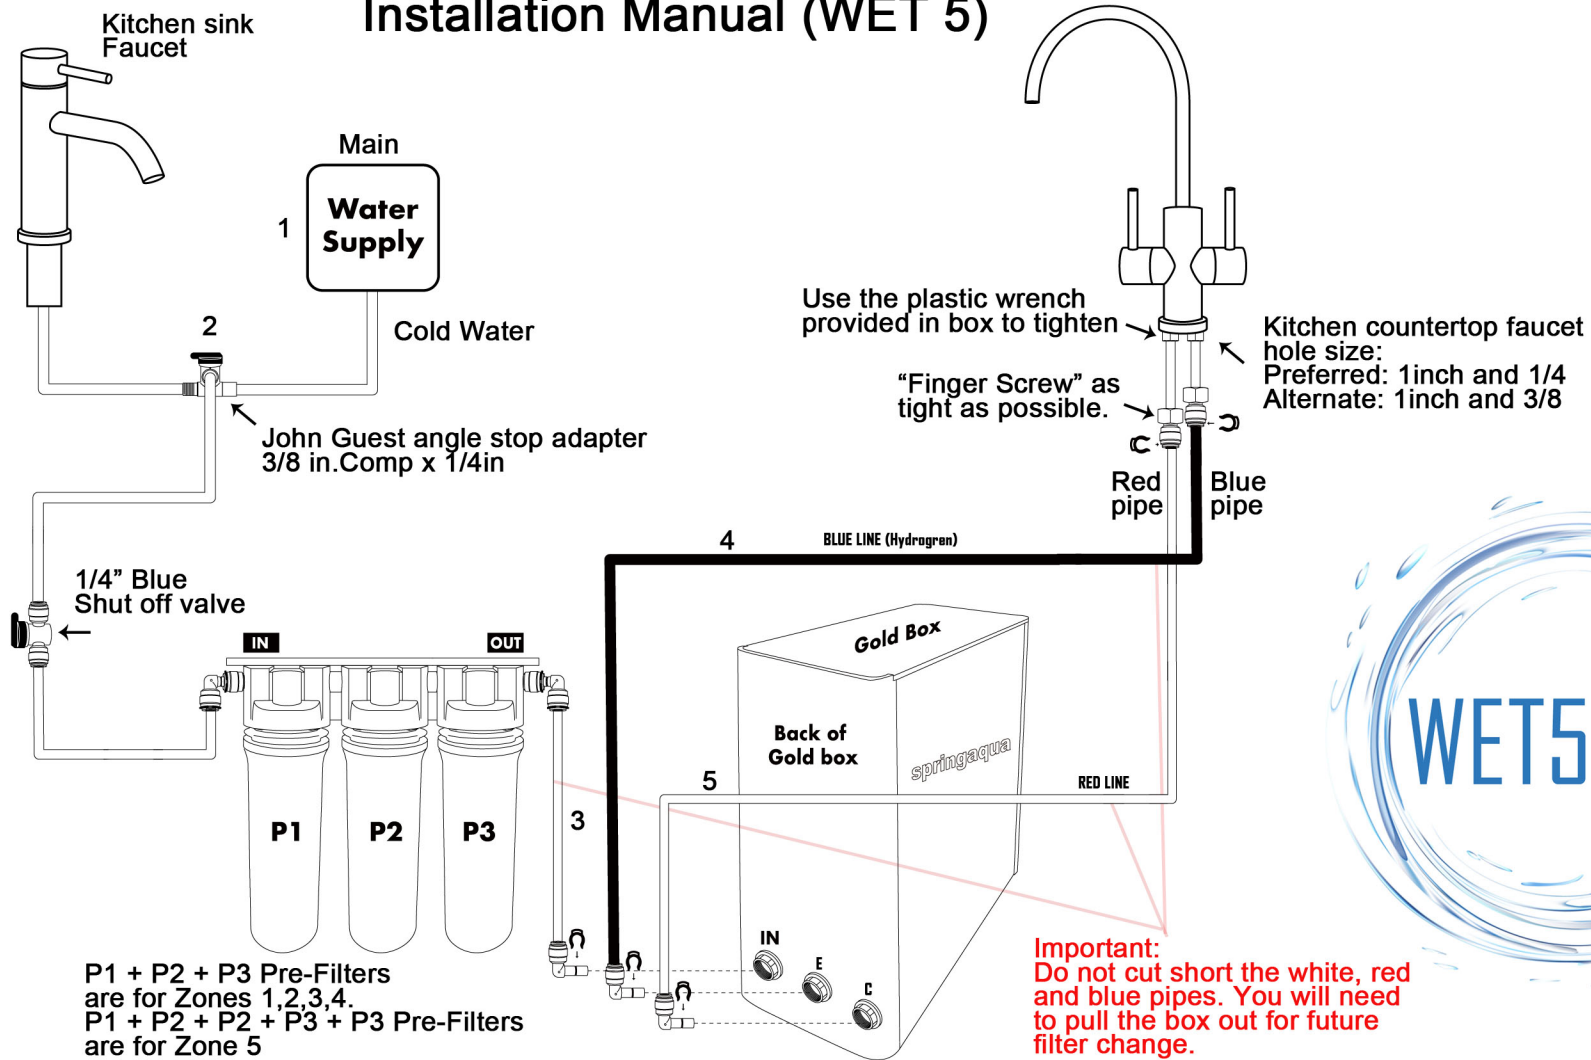

1. Shut off cold water supply under the sink.
2. Angle stop adapter splits cold water line out connecting white tube to 1/4 inch blue shut off valve on pre-filters.
3. White tube exits the P3 and connects to gold box "IN".
4. Gold box "E" (blue pipe) connects to faucet left.
5. Gold box "C" (red pipe) connects to faucet right.
6. Turn on water supply and flush filter for 10 minutes both sides together.
7. Check to make sure there are no leaks.